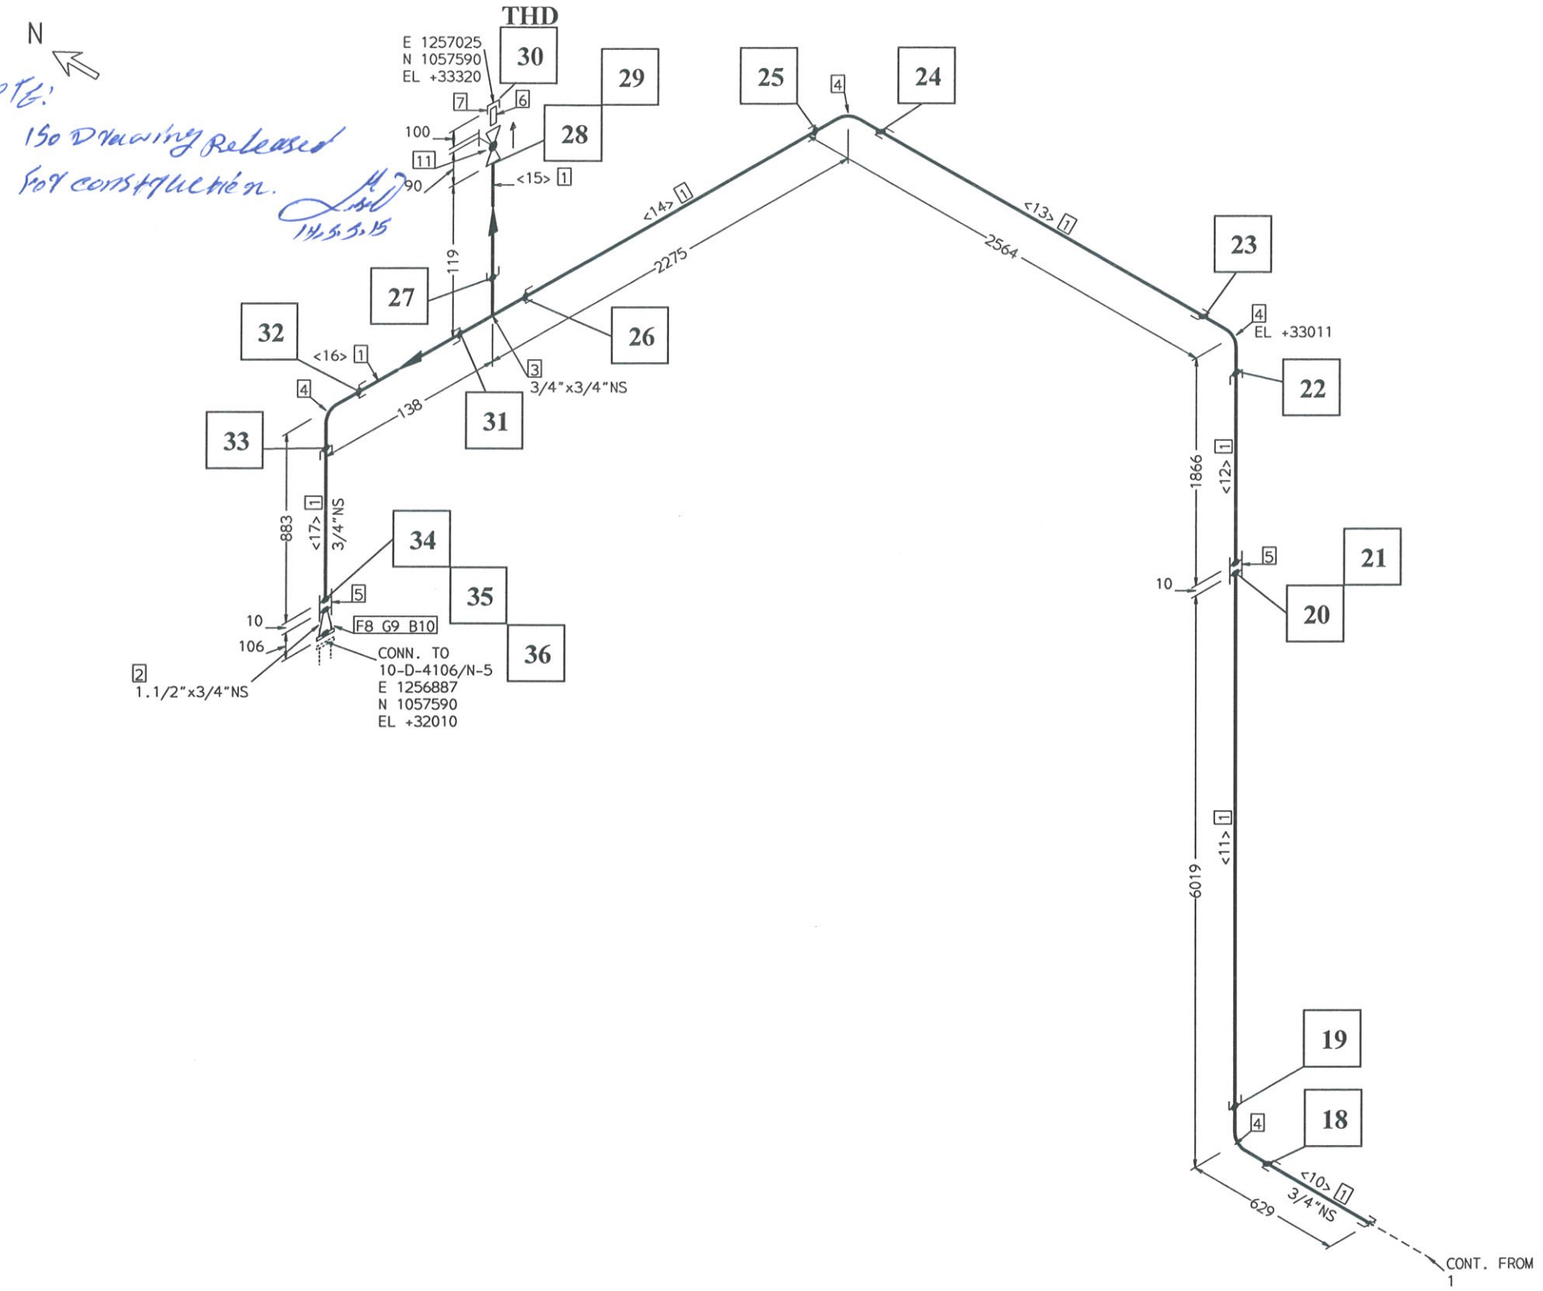


FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	PIPE			
1	PIPE 40S PE SMLS A312-TP304 ASME B36.19	3/4	P74C0A	14.3M
	FITTINGS			
2	SWAGED NIPPLE CON. 40S 40S PBE A403-WP304 MSS SP-95	1.1/2 x 3/4	NSC90YYG0A	1
3	EQUAL TEE 3000# SW A182-F304 ASME B16.11	3/4 x 3/4	TT9090SG0A	1
4	ELBOW 90 3000# SW A182-F304 ASME B16.11	3/4	EL90SG0A	4
5	FULL COUPLING 3000# SW A182-F304 ASME B16.11	3/4	CF90SG0A	2
6	STRAIGHT NIPPLE 40S SMLS TOE A312-TP304 (L=100mm) ASME B36.19	3/4	NI74YNC0A	1
7	CAP 3000# NPT A182-F304 ASME B16.11	3/4	KA90NG0A	1
	FLANGES			
8	FLANGE SOCKET WELD 40S 150# RF A182-F304 ASME B16.5 SRF	1.1/2	F12K74RG0A	1

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	GASKETS			
9	GASKET 150# RF SHEET NON-ASBESTOS 2mm THK KLINGER C-4430 or EQ. ASME B16.21	1.1/2	G12S1Q19	1
	BOLTS			
10	70 STUD BOLT ASTM A193 GR.B7 + 2 HEAVY HEX NUTS ASTM A194 GR.2H ASME B18.2 PTFE COATED	1/2	BSP0CUP	4
	VALVES / IN-LINE ITEMS			
11	VALVE GLOBE 800# SW A182-F304 BODY W/304SS TRIM HF-BODY SEAT OSY-BB	3/4	V0U4S1	1

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<10>	610	3/4		<11>	6000	3/4	
<12>	1847	3/4		<13>	2526	3/4	
<14>	2237	3/4		<15>	100	3/4	
<16>	100	3/4		<17>	864	3/4	

PROJECT:	HDPE PLANT AND UTILITY (2146)
OWNER:	RAYAN POLYMER POUYA COMPANY
CONTRACTOR:	HAMPA ENERGY ENGINEERING & DESIGN COMPANY
DOCUMENT NO.:	2146-ISO-25-0010
LINE NO.:	3/4"-HX-41003-1S1
ISOMETRIC NO.:	ISO-25-1023
SHT NO.:	2 /2
REF. P&ID DWG.:	4101
REF. PLAN DWG.:	2146-10-20-DD-PI-DWG-0011-12

PRESSURE (barg.) DESIGN:	7.0
OPERATING:	3.23
TEMPERATURE (C.) DESIGN:	120
OPERATING:	45
INSULATION TYPE:	NO INS
THK (mm):	0
TEST FLUID:	Air
PRESSURE: (barg.)	7.7

PAINT:	P-13
NDT:	B
PWHT:	ASME B31.3
LOCATION:	AG
LEVEL:	1
LINE CLASS:	1S1

REV.	DATE	DESCRIPTION	PRE'D.	CHE'D BY	APP'D BY
0	01.08.2026	TOTALLY HOLD	M.IM	R.D	M.A

NOTE

1- ROOT GAPS OF BUTT WELD FITTINGS ARE NOT INCLUDED IN DIMENSIONS
2- ISOMETRIC DRAWING FOR 1 1/2" AND SMALLER PIPINGS ARE JUST FOR INFORMATION. PIPING ROUTING, DIMENSIONS AND ELEVATIONS TO BE CHECKED BY CONSTRUCTION CONSTRUCTOR BEFORE INSTALLATION.
3- FOR 1 1/2" AND SMALLER, SUPPORTS TO BE SELECTED BY CONSTRUCTION CONSTRUCTOR EXCEPT AS NOTED.
4- ACTUAL DIMENSION AND SIZE OF SPECIAL/INSTRUMENT ITEMS SHALL BE CHECKED BEFORE SPOOL FABRICATION BY CONSTRUCTION CONTRACTOR.

Piping Supervision
شرکت رایان پلیمر پویا
(سهامی خاص)
نظارت پایپینگ

شرکت فنی و مهندسی پتروپارس قدرت
Petro Pars Ghodrat Co.
کارگاه پتروشیمی رایان پلیمر
واحد دفتر فنی پایپینگ

THIS DOCUMENT AND THE DESIGN IT COVERS IS THE PROPERTY OF POGC AND ALL RIGHTS ARE RESERVED. NEITHER IN WHOLE NOR IN PART MAY BE REPRODUCED OR TRANSMITTED TO THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF OWNER.