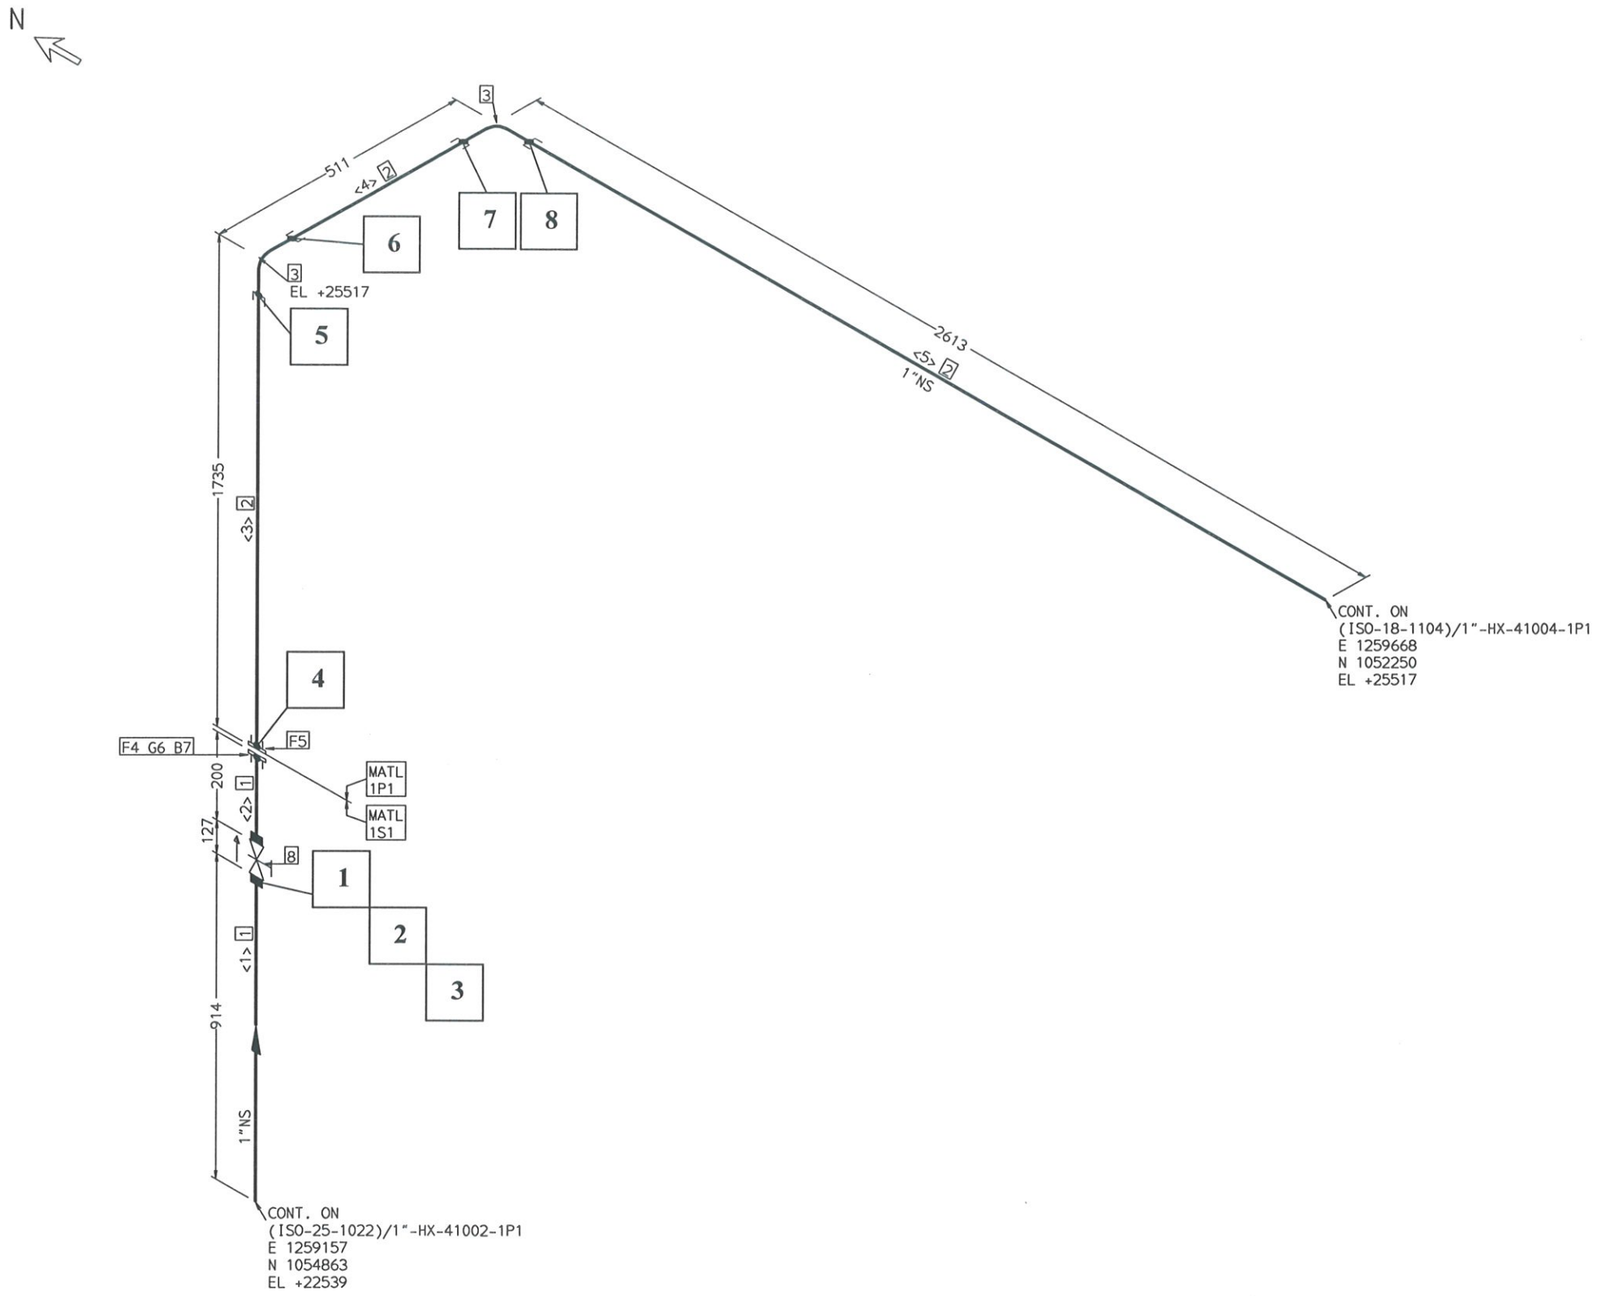



## FABRICATION MATERIALS

| PT NO | COMPONENT DESCRIPTION | N.S. (INS) | ITEM CODE | QTY |
|---|---|---|---|---|
| | PIPE | | | |
| 1 | PIPE 40S PE SMLS A312-TP304 ASME B36.19 | 1 | P74C0A | 1.2M |
| 2 | PIPE S80 PE SMLS API 5L-B PSL1 ASME B36.10 | 1 | P08A0C | 4.8M |
| | FITTINGS | | | |
| 3 | ELBOW 90 3000# SW A105 ASME B16.11 | 1 | EL90SE0A | 2 |
| | FLANGES | | | |
| 4 | FLANGE SOCKET WELD 40S 150# RF A182-F304 ASME B16.5 SRF | 1 | F12K74RG0A | 1 |
| 5 | FLANGE SOCKET WELD S80 150# RF A105 ASME B16.5 SRF | 1 | F12K08RE0A | 1 |

## ERECTION MATERIALS

| PT NO | COMPONENT DESCRIPTION | N.S. (INS) | ITEM CODE | QTY |
|---|---|---|---|---|
| | GASKETS | | | |
| 6 | GASKET 150# RF SHEET NON-ASBESTOS 2mm THK KLINGER C-4430 or EQ. ASME B16.21 | 1 | G12S1Q19 | 1 |
| | BOLTS | | | |
| 7 | 70 STUD BOLT ASTM A193 GR.B7 + 2 HEAVY HEX NUTS ASTM A194 GR.2H ASME B18.2 PTFE COATED | 1/2 | BSP0CUP | 4 |
| | VALVES / IN-LINE ITEMS | | | |
| 8 | VALVE GATE 800# SW A182-F304 BODY W/304SS TRIM HF-BODY SEAT OSY-BB SOLID WEDGE | 1 | VGU4S1 | 1 |

## CUT PIPE LENGTH

| PIECE NO | CUT LENGTH | N.S. (INS) | REMARKS | PIECE NO | CUT LENGTH | N.S. (INS) | REMARKS |
|---|---|---|---|---|---|---|---|
| <1> | 914 | 1 | | <2> | 195 | 1 | |
| <3> | 1708 | 1 | | <4> | 467 | 1 | |
| <5> | 2591 | 1 | | | | | |

| | |
|---|---|
| PROJECT: | HDPE PLANT AND UTILITY (2146) |
| OWNER: | RAYAN POLYMER POUYA COMPANY |
| CONTRACTOR: | HAMPA ENERGY ENGINEERING & DESIGN COMPANY |
| DOCUMENT NO.: | 2146-ISO-25-0010 |
| LINE NO.: | 1"-HX-41004-1P1 |
| ISOMETRIC NO.: | ISO-25-1024 |
| SHT NO.: | 1 /1 |
| REF. P&ID DWG.: | 4101/7012 |
| REF. PLAN DWG.: | 2146-10-20-DD-PI-DWG-0011-12 |

| | |
|---|---|
| PRESSURE (barg.) | |
| DESIGN: | 7.0 |
| OPERATING: | 3.23 |
| TEMPERATURE (C.) | |
| DESIGN: | 120 |
| OPERATING: | 45 |
| INSULATION | |
| TYPE: | NO INS |
| THK (mm): | 0 |
| TEST | |
| FLUID: | Air |
| PRESSURE: (barg.) | 7.7 |

| | |
|---|---|
| PAINT: | P-1 |
| NDT: | B |
| PWHT: | ASME B31.3 |
| LOCATION: | AG |
| LEVEL: | 1 |
| LINE CLASS: | 1P1 |

| REV. | DATE | DESCRIPTION | PRE'D. | CHE'D BY | APP'D BY |
|---|---|---|---|---|---|
| 0 | 01.08.2026 | ISSUED FOR CONSTRUCTION | M.IM | R.D | M.A |

NOTE

1- ROOT GAPS OF BUTT WELD FITTINGS ARE NOT INCLUDED IN DIMENSIONS
2- ISOMETRIC DRAWING FOR 1 1/2" AND SMALLER PIPINGS ARE JUST FOR INFORMATION. PIPING ROUTING, DIMENSIONS AND ELEVATIONS TO BE CHECKED BY CONSTRUCTION CONSTRUCTOR BEFORE INSTALLATION.
3- FOR 1 1/2" AND SMALLER, SUPPORTS TO BE SELECTED BY CONSTRUCTION CONSTRUCTOR EXCEPT AS NOTED.
4- ACTUAL DIMENSION AND SIZE OF SPECIAL/INSTRUMENT ITEMS SHALL BE CHECKED BEFORE SPOOL FABRICATION BY CONSTRUCTION CONTRACTOR.

Piping Supervision

THIS DOCUMENT AND THE DESIGN IT COVERS IS THE PROPERTY OF POGC AND ALL RIGHTS ARE RESERVED. NEITHER IN WHOLE NOR IN PART MAY BE REPRODUCED OR TRANSMITTED TO THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF OWNER.