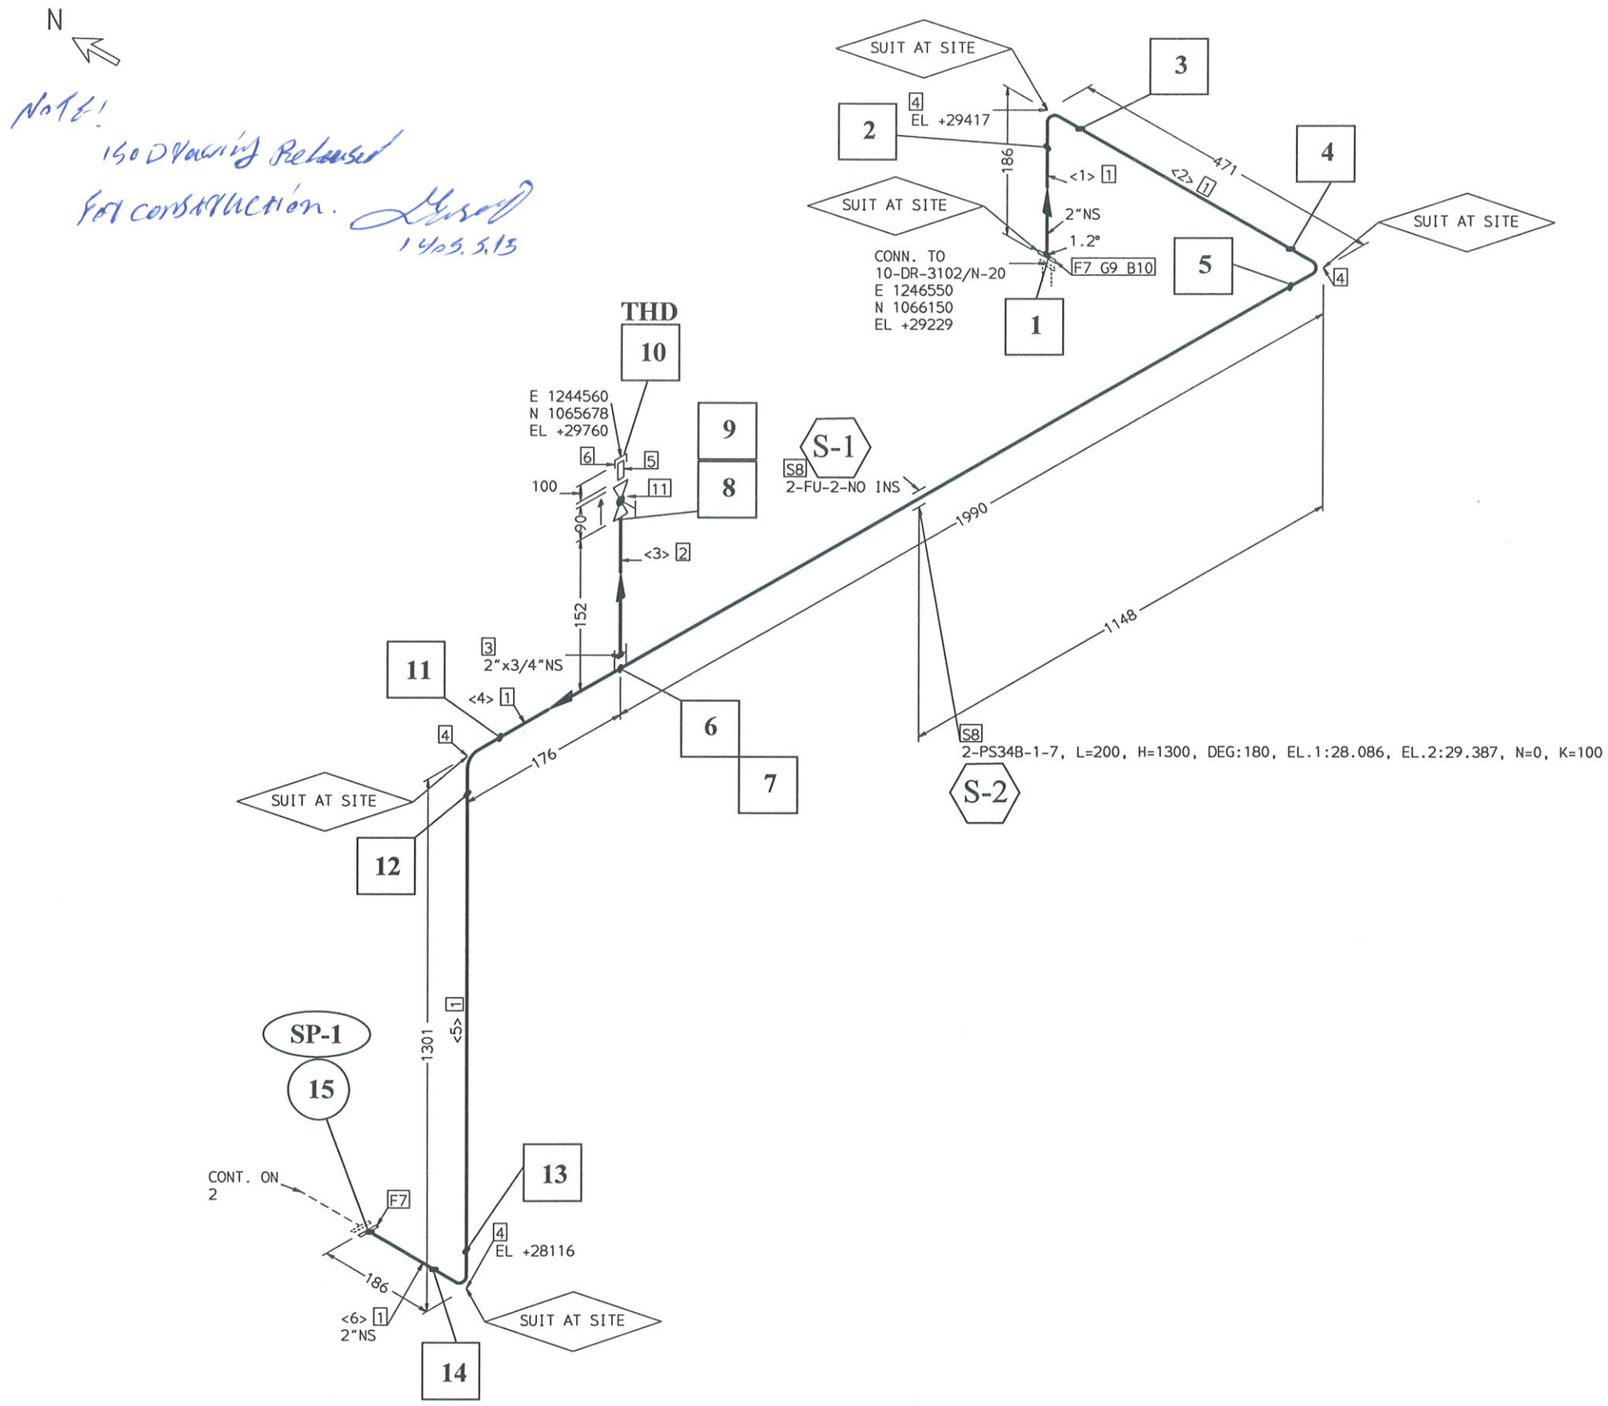


FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	PIPE			
1	PIPE S40 BE ERW(EJ=0.85) API 5L-B PSL1 ASME B36.10	2	P04D1A	3.7M
2	PIPE S80 PE SMLS API 5L-B PSL1 ASME B36.10	3/4	P08A0C	0.1M
	FITTINGS			
3	HALF COUPLING 3000# SW A105 ASME B16.11	2 x 3/4	CH90SE0A	1
4	ELBOW 90 LR S40 BW A234-WPBW ERW(EJ=0.85) ASME B16.9	2	EL04BE2A	4
5	STRAIGHT NIPPLE S80 TOE SMLS API 5L-B PSL1 (L=100mm) ASME B36.10	3/4	NI08YNA0C	1
6	CAP 3000# NPT A105 ASME B16.11	3/4	KA90NE0A	1
	FLANGES			
7	FLANGE SLIP ON 150# RF A105 ASME B16.5 SRF	2	F12SRE0A	2
	SUPPORTS			
8	STRESS SUPPORT	2	1P1D-ATTA-2"	2

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	GASKETS			
9	GASKET 150# RF SHEET NON-ASBESTOS 2mm THK KLINGER C-4430 or EQ. ASME B16.21	2	G12S1Q19	1
	BOLTS			
10	90 STUD BOLT ASTM A193 GR.B7 + 2 HEAVY HEX NUTS ASTM A194 GR.2H ASME B18.2 PTFE COATED	5/8	BSP0CUP	4
	VALVES / IN-LINE ITEMS			
11	VALVE GLOBE 800# SW A105 BODY W/13Cr TRIM HF-BODY SEAT OSY-BB HAND WHEEL OP. MANUF.STD BS 5352 API 598	3/4	V0U1S1	1

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<1>	100	2		<2>	319	2	
<3>	100	3/4		<4>	2014	2	
<5>	1149	2		<6>	100	2	

PROJECT:	HDPE PLANT AND UTILITY (2146)
OWNER:	RAYAN POLYMER POUYA COMPANY
CONTRACTOR:	HAMPA ENERGY ENGINEERING & DESIGN COMPANY
DOCUMENT NO.:	2146-ISO-25-0010
LINE NO.:	2"-CWR-31016-1P1D
ISOMETRIC NO.:	ISO-25-1004
SHT NO.:	1 /2
REF. P&ID DWG.:	3104
REF. PLAN DWG.:	2146-10-20-DD-PI-DWG-0011-12

PRESSURE (barg.)	
DESIGN:	8 , FV
OPERATING:	4.5
TEMPERATURE (C.)	
DESIGN:	85
OPERATING:	43
INSULATION	
TYPE:	NO INS
THK (mm):	0
TEST	
FLUID:	Water
PRESSURE: (barg.)	12

PAINT:	P-1
NDT:	B
PWHT:	ASME B31.3
LOCATION:	AG
LEVEL:	1
LINE CLASS:	1P1D

REV.	DATE	DESCRIPTION	PRE'D.	CHE'D BY	APP'D BY
0	01.08.2026	ISSUED FOR CONSTRUCTION (WITH HOLD)	M.IM	R.D	M.A

NOTE

1- ROOT GAPS OF BUTT WELD FITTINGS ARE NOT INCLUDED IN DIMENSIONS
2- ISOMETRIC DRAWING FOR 1 1/2" AND SMALLER PIPINGS ARE JUST FOR INFORMATION. PIPING ROUTING, DIMENSIONS AND ELEVATIONS TO BE CHECKED BY CONSTRUCTION CONSTRUCTOR BEFORE INSTALLATION.
3- FOR 1 1/2" AND SMALLER, SUPPORTS TO BE SELECTED BY CONSTRUCTION CONSTRUCTOR EXCEPT AS NOTED.
4- ACTUAL DIMENSION AND SIZE OF SPECIAL/INSTRUMENT ITEMS SHALL BE CHECKED BEFORE SPOOL FABRICATION BY CONSTRUCTION CONTRACTOR.

Piping Supervision
شرکت رایان پلیمر پویا
(سهامی خاص)
نظارت پایپینگ

THIS DOCUMENT AND THE DESIGN IT COVERS IS THE PROPERTY OF POGC AND ALL RIGHTS ARE RESERVED. NEITHER IN WHOLE NOR IN PART MAY BE REPRODUCED OR TRANSMITTED TO THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF OWNER.