
N

NOTE: ISO Drawing Released for construction. 1405. 5.19

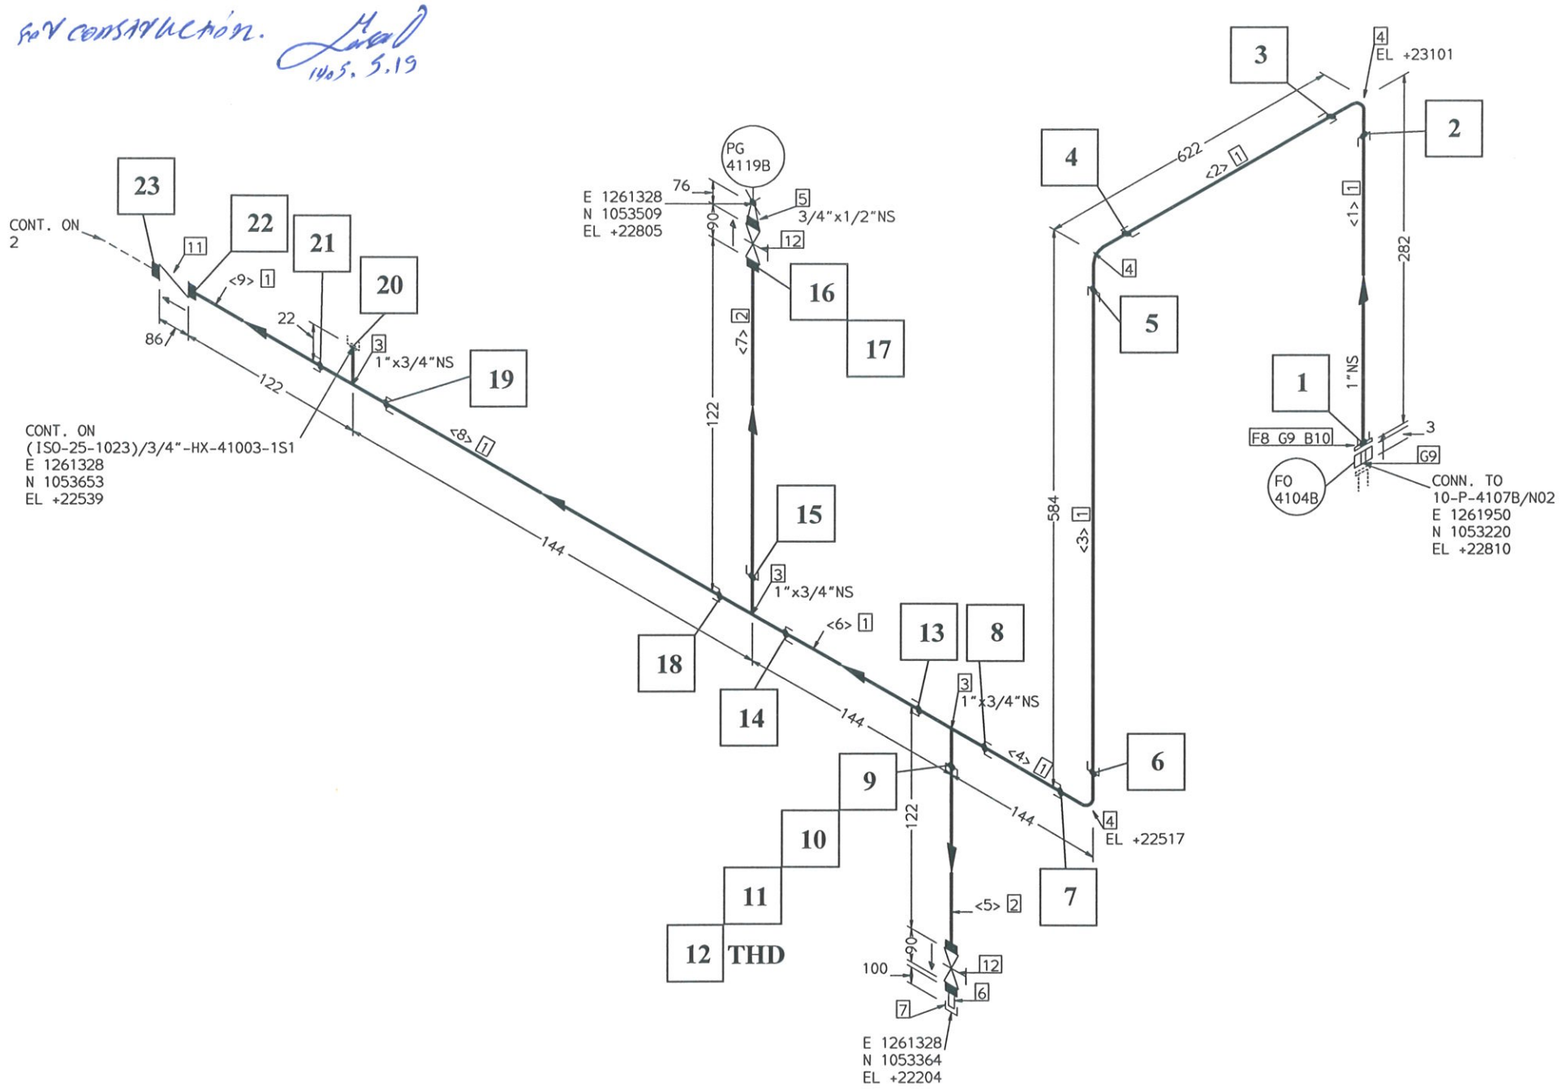

FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	PIPE			
1	PIPE 40S PE SMLS A312-TP304 ASME B36.19	1	P74C0A	1.8M
2	PIPE 40S PE SMLS A312-TP304 ASME B36.19	3/4	P74C0A	0.2M
	FITTINGS			
3	REDUCING TEE 3000# SW A182-F304 ASME B16.11	1 x 3/4	TT9090SG0A	3
4	ELBOW 90 3000# SW A182-F304 ASME B16.11	1	EL90SG0A	3
5	SWAGED NIPPLE CON. 40S 40S PLE/TSE A403-WP304 MSS SP-95	3/4 x 1/2	NSC90YNG0A	1
6	STRAIGHT NIPPLE 40S SMLS TOE A312-TP304 (L=100mm) ASME B36.19	3/4	NI74YNC0A	1
7	CAP 3000# NPT A182-F304 ASME B16.11	3/4	KA90NG0A	1
	FLANGES			
8	FLANGE SOCKET WELD 40S 300# RF A182-F304 ASME B16.5 SRF	1	F14K74RG0A	1

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	GASKETS			
9	GASKET SPIRAL WOUND 300# RF TEFLON FILLER 304SS HOOP & I.R. CS O.R. 4.5mm THK KLINGER MAXIFELEX CRIR OR EQ. ASME B 16.20	1	G14V6R79	2
	BOLTS			
10	90 STUD BOLT ASTM A193 GR.B7 + 2 HEAVY HEX NUTS ASTM A194 GR.2H ASME B18.2 PTFE COATED	5/8	BSP0CUP	4
	VALVES / IN-LINE ITEMS			
11	VALVE CHECK 800# SW PISTON A182-F304 BODY W/304SS TRIM HF-BODY SEAT HORIZ LIFT-BB	1	VCU4S1	1
12	VALVE GATE 800# SW A182-F304 BODY W/304SS TRIM HF-BODY SEAT OSY-BB SOLID WEDGE	3/4	VGU4S1	2

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<1>	250	1		<2>	578	1	
<3>	540	1		<4>	100	1	
<5>	100	3/4		<6>	100	1	
<7>	100	3/4		<8>	100	1	
<9>	100	1					

PROJECT:	HDPE PLANT AND UTILITY (2146)
OWNER:	RAYAN POLYMER POUYA COMPANY
CONTRACTOR:	HAMPA ENERGY ENGINEERING & DESIGN COMPANY
DOCUMENT NO.:	2146-ISO-25-0010
LINE NO.:	1"-HX-41002-1P1
ISOMETRIC NO.:	ISO-25-1022
SHT NO.:	1 /4
REF. P&ID DWG.:	4101
REF. PLAN DWG.:	2146-10-20-DD-PI-DWG-0011-12

PRESSURE (barg.) DESIGN:	7.0
PRESSURE (barg.) OPERATING:	3.23
TEMPERATURE (C.) DESIGN:	120
TEMPERATURE (C.) OPERATING:	45
INSULATION TYPE:	NO INS
INSULATION THK (mm):	0
TEST FLUID:	Air
TEST PRESSURE: (barg.)	7.7
PAINT:	P-13
NDT:	B
PWHT:	ASME B31.3
LOCATION:	AG
LEVEL:	1
LINE CLASS:	1P1

REV.	DATE	DESCRIPTION	PRE'D.	CHE'D BY	APP'D BY
0	01.08.2026	TOTALLY HOLD	M.IM	R.D	M.A

NOTE

1- ROOT GAPS OF BUTT WELD FITTINGS ARE NOT INCLUDED IN DIMENSIONS
2- ISOMETRIC DRAWING FOR 1 1/2" AND SMALLER PIPINGS ARE JUST FOR INFORMATION. PIPING ROUTING, DIMENSIONS AND ELEVATIONS TO BE CHECKED BY CONSTRUCTION CONSTRUCTOR BEFORE INSTALLATION.
3- FOR 1 1/2" AND SMALLER, SUPPORTS TO BE SELECTED BY CONSTRUCTION CONSTRUCTOR EXCEPT AS NOTED.
4- ACTUAL DIMENSION AND SIZE OF SPECIAL/INSTRUMENT ITEMS SHALL BE CHECKED BEFORE SPOOL FABRICATION BY CONSTRUCTION CONTRACTOR.

Piping Supervision — شرکت رایان پلیمر پویا (سهامی خاص) — نظارت پایپینگ

Petro Pars Ghodrat Co. — شرکت فنی و مهندسی پتروپارس قدرت — کارگاه پتروشیمی رایان پلیمر — واحد دفتر فنی پایپینگ

THIS DOCUMENT AND THE DESIGN IT COVERED IS THE PROPERTY OF PODC AND ALL RIGHTS ARE RESERVED. NEITHER IN WHOLE NOR IN PART MAY BE REPRODUCED OR TRANSMITTED TO THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF OWNER.