
NOTE:
ISO Drawing Released
For construction- 14.05.5.15

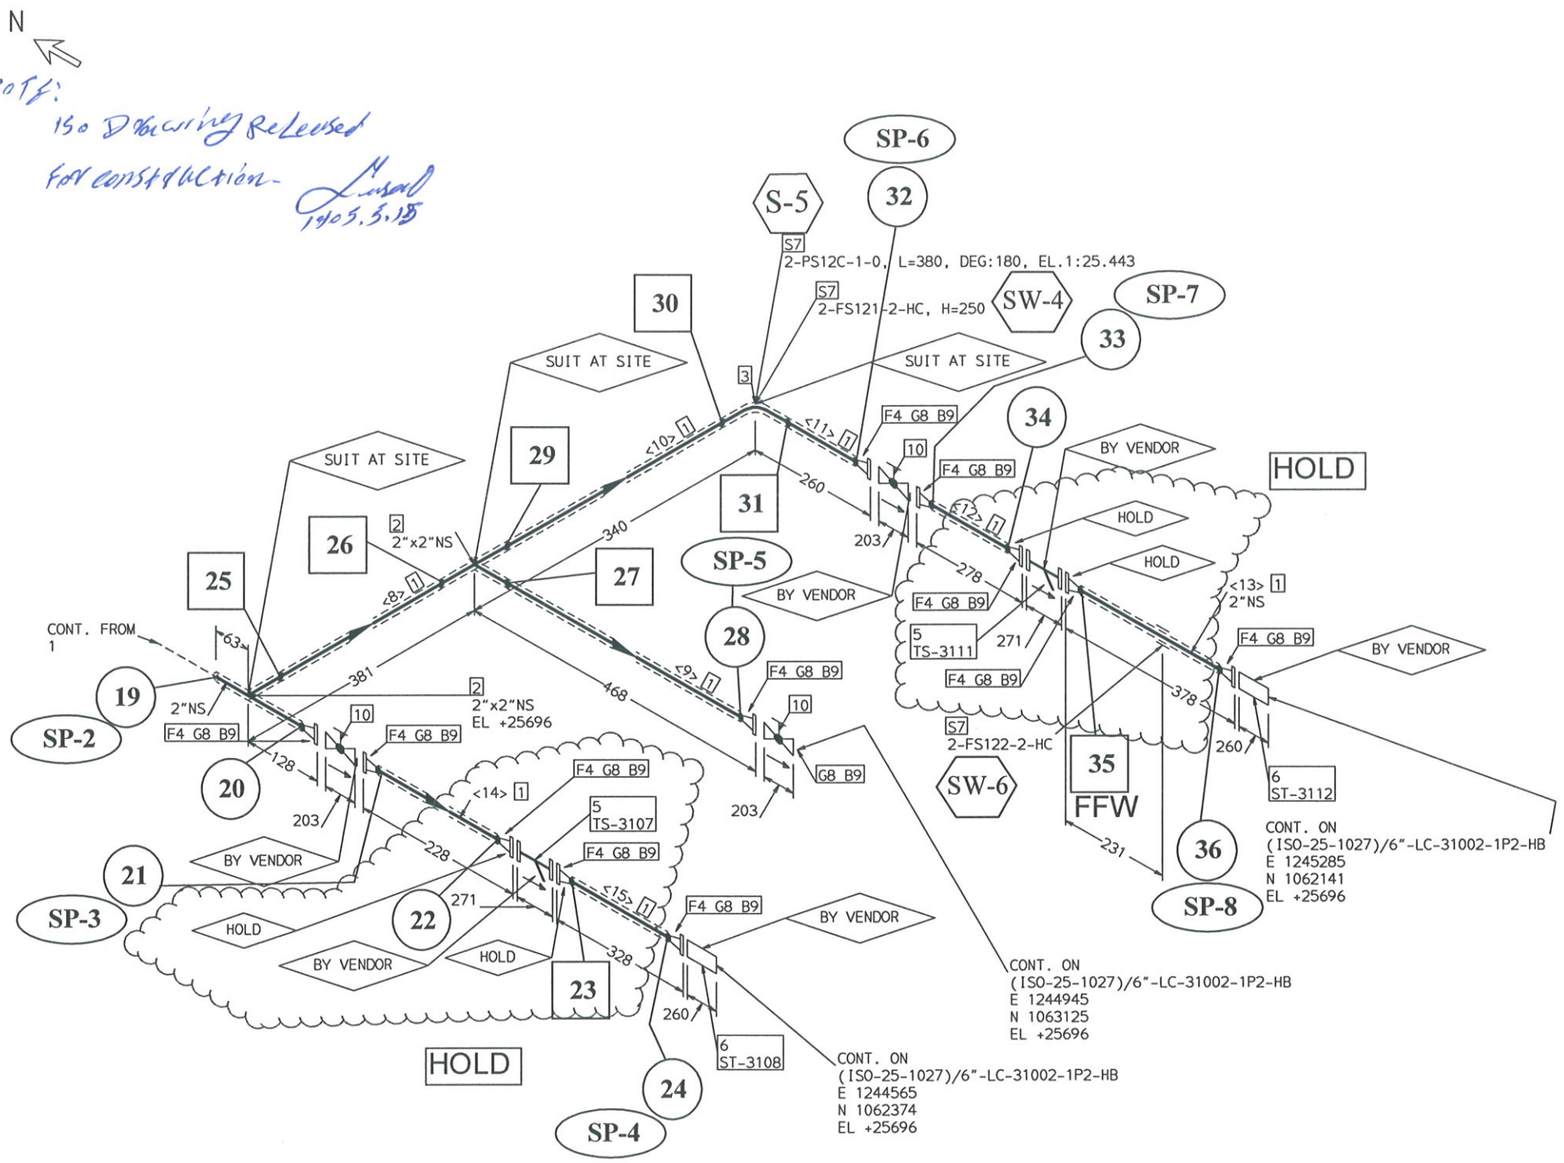

FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	PIPE			
1	PIPE S40 BE ERW(EJ=0.85) API 5L-B PSL1 ASME B36.10	2	P04D1A	1.7M
	FITTINGS			
2	EQUAL TEE S40 S40 BW A234-WPBW ERW(EJ=0.85) ASME B16.9	2 x 2	TT0404BE2A	2
3	ELBOW 90 LR S40 BW A234-WPBW ERW(EJ=0.85) ASME B16.9	2	EL04BE2A	1
	FLANGES			
4	FLANGE WELDING NECK S40 150# RF A105 ASME B16.5 SRF	2	F12W04RE0A	11
	VALVES / IN-LINE ITEMS			
5	Y-STRAINER 150# RF CS BODY W/304SS ELEMENT	2		2
6	STEAM TRAP #150 RF CS BODY W/SS TRIM & STRAINER	2	TRPL	2
	SUPPORTS			
7	STRESS SUPPORT	2	1P2-ATTA-2"-	3

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	GASKETS			
8	GASKET 150# RF GRAPHITE W/SS REINFORCEMENT 2.0mm THK KLINGER PSM/AS or EQ. ASME B16.21	2	G12S1Q20	12
	BOLTS			
9	90 STUD BOLT ASTM A193 GR.B7 + 2 HEAVY HEX NUTS ASTM A194 GR.2H ASME B18.2 PTFE COATED	5/8	BSP0CUP	48
	VALVES / IN-LINE ITEMS			
10	VALVE GLOBE 150# RF A216-WCB BODY W/13Cr TRIM HF-BODY SEAT & DISC SEAT OSY-BB HAND WHEEL OP.	2	VOA1R3	3

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<8>	253	2		<9>	340	2	
<10>	200	2		<11>	120	2	
<12>	150	2		<13>	250	2	
<14>	100	2		<15>	200	2	

PROJECT:	HDPE PLANT AND UTILITY (2146)
OWNER:	RAYAN POLYMER POUYA COMPANY
CONTRACTOR:	HAMPA ENERGY ENGINEERING & DESIGN COMPANY
DOCUMENT NO.:	2146-ISO-25-0010
LINE NO.:	3"-LC-31002-1P2-HC
ISOMETRIC NO.:	ISO-25-1026
SHT NO.:	3 /3
REF. P&ID DWG.:	3104/8059(1)
REF. PLAN DWG.:	2146-10-20-DD-PI-DWG-0011-12

PRESSURE (barg)	
DESIGN:	1 , FV
OPERATING:	ATM
TEMPERATURE (C.)	
DESIGN:	130
OPERATING:	100
INSULATION	
TYPE:	HC
THK (mm):	70
TEST	
FLUID:	Water
PRESSURE: (barg.)	1.5

PAINT:	P-4
NDT:	A
PWHT:	ASME B31.3
LOCATION:	AG
LEVEL:	2
LINE CLASS:	1P2

REV.	DATE	DESCRIPTION	PRE'D.	CHE'D BY	APP'D BY
0	01.08.2026	ISSUED FOR CONSTRUCTION(WITH HOLD)	M.IM	R.D	M.A

NOTE
1- ROOT GAPS OF BUTT WELD FITTINGS ARE NOT INCLUDED IN DIMENSIONS
2- ISOMETRIC DRAWING FOR 1 1/2" AND SMALLER PIPINGS ARE JUST FOR INFORMATION. PIPING ROUTING, DIMENSIONS AND ELEVATIONS TO BE CHECKED BY CONSTRUCTION CONSTRUCTOR BEFORE INSTALLATION.
3- FOR 1 1/2" AND SMALLER, SUPPORTS TO BE SELECTED BY CONSTRUCTION CONSTRUCTOR EXCEPT AS NOTED.
4- ACTUAL DIMENSION AND SIZE OF SPECIAL/INSTRUMENT ITEMS SHALL BE CHECKED BEFORE SPOOL FABRICATION BY CONSTRUCTION CONTRACTOR.

Piping Supervision
نظارت پایپینگ

THIS DOCUMENT AND THE DESIGN IT COVERS IS THE PROPERTY OF POGC AND ALL RIGHTS ARE RESERVED. NEITHER IN WHOLE NOR IN PART MAY BE REPRODUCED OR TRANSMITTED TO THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF OWNER.