NOTE!
Holded Joints Released
For construction-
1405.5.13

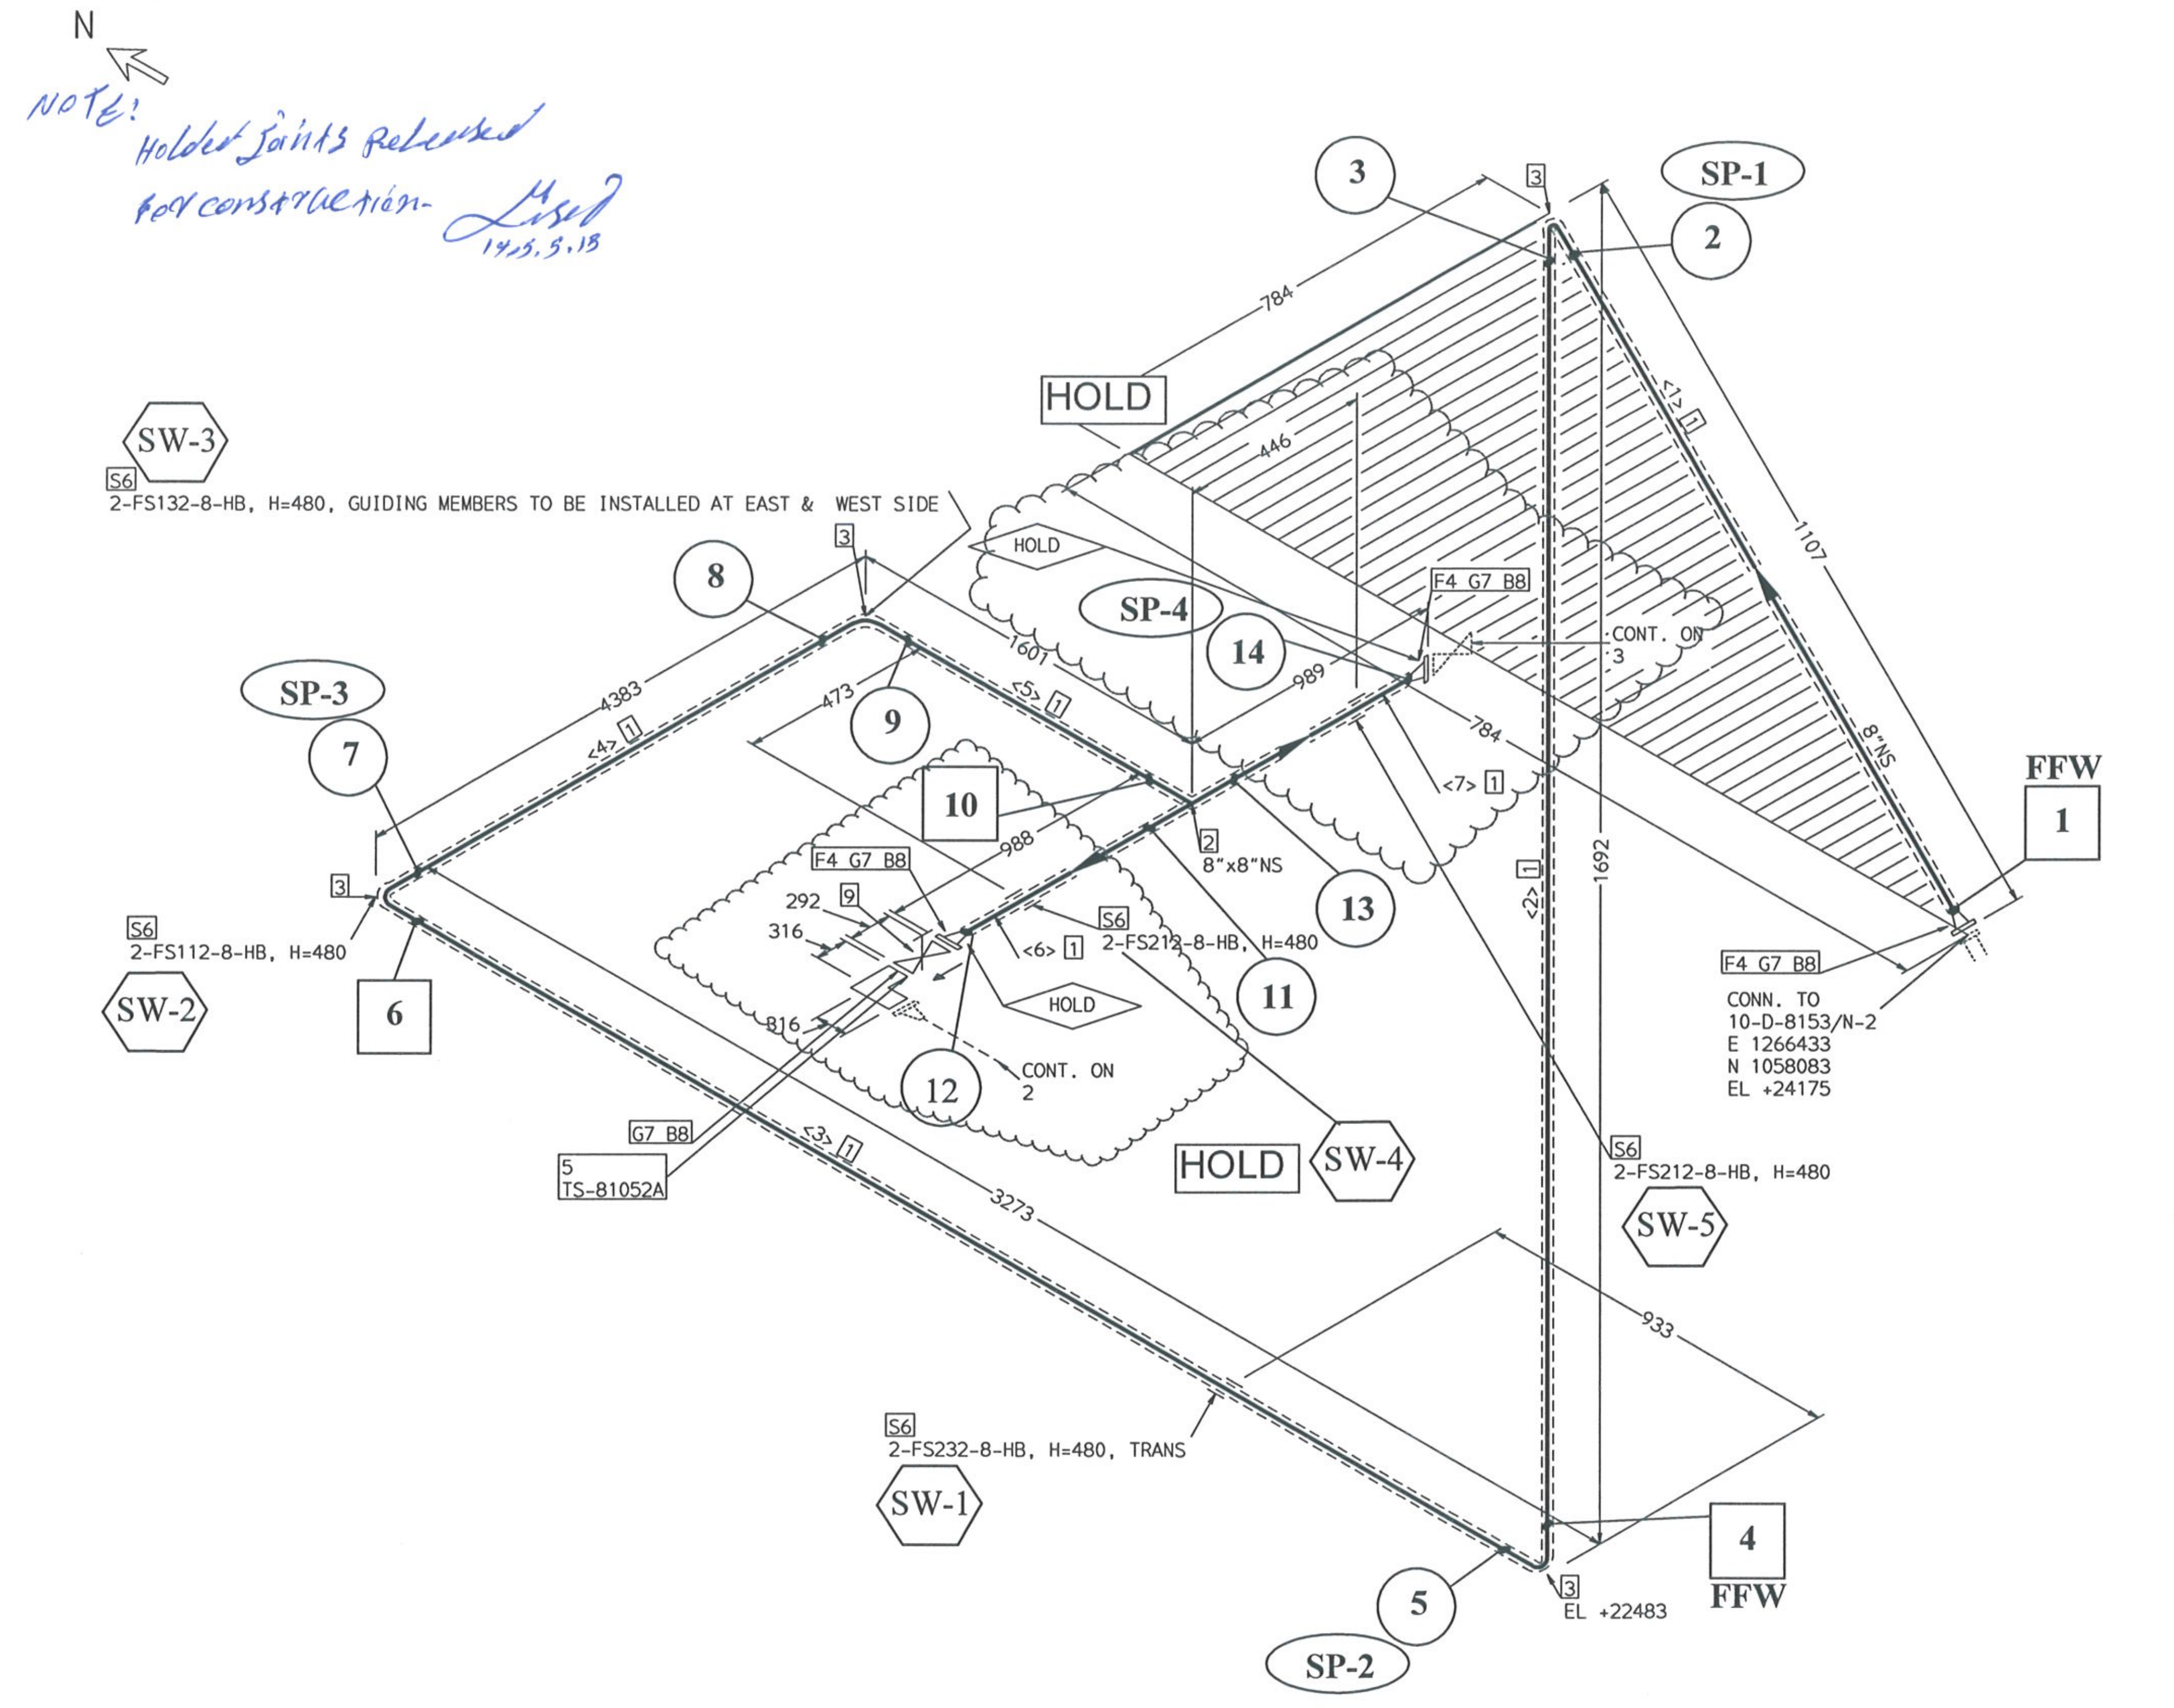

FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	PIPE			
1	PIPE S30 BE ERW(EJ=0.85) API 5L-B PSL1 ASME B36.10	8	P03D1A	10.8M
	FITTINGS			
2	EQUAL TEE S30 S30 BW A234-WPBW ERW(EJ=0.85) ASME B16.9	8 x 8	TT0303BE2A	1
3	ELBOW 90 LR S30 BW A234-WPBW ERW(EJ=0.85) ASME B16.9	8	EL03BE2A	4
	FLANGES			
4	FLANGE WELDING NECK S30 150# RF A105 ASME B16.5 SRF	8	F12W03RE0A	3
	VALVES / IN-LINE ITEMS			
5	TEE(ELBOW) TYPE STRAINER #150.RF DESPARA	8		1
	SUPPORTS			
6	STRESS SUPPORT	8	1P2-ATTA-8"-	5

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	GASKETS			
7	GASKET 150# RF GRAPHITE W/SS REINFORCEMENT 2.0mm THK KLINGER PSM/AS or EQ. ASME B16.21	8	G12S1Q20	4
	BOLTS			
8	110 STUD BOLT ASTM A193 GR.B7 + 2 HEAVY HEX NUTS ASTM A194 GR.2H ASME B18.2 PTFE COATED	3/4	BSP0CUP	32
	VALVES / IN-LINE ITEMS			
9	VALVE GATE 150# RF A216-WCB BODY W/13Cr TRIM HF-BODY SEAT & DISC SEAT OSY-BB FLEXIBLE WEDGE HAND WHEEL OP.	8	VGA1R3	1

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<1>	700	8		<2>	1082	8	
<3>	2663	8		<4>	3773	8	
<5>	1118	8		<6>	708	8	
<7>	709	8					

PROJECT:	HDPE PLANT AND UTILITY (2146)	PRESSURE (barg.) DESIGN: 1.8, FV OPERATING: 0.22	PAINT: P-4							
OWNER:	RAYAN POLYMER POUYA COMPANY		NDT: A							
CONTRACTOR:	HAMPA ENERGY ENGINEERING & DESIGN COMPANY	TEMPERATURE (C.) DESIGN: 120 OPERATING: 75	PWHT: ASME B31.3							
DOCUMENT NO.:	2146-ISO-25-0010	INSULATION TYPE: HB THK (mm): 70	LOCATION: AG							
LINE NO.: 8"-LC-81112-1P2-HB	ISOMETRIC NO.: ISO-25-1037 SHT NO.: 1 /4		LEVEL: 2							
REF. P&ID DWG.: 8059		TEST FLUID: Water PRESSURE (barg.): 2.7	LINE CLASS: 1P2	0	01.08.2026	ISSUED FOR CONSTRUCTION (WITH HOLD)	M.IM	R.D	M.A	
REF. PLAN DWG.: 2146-10-20-DD-PI-DWG-0011-12				REV.	DATE	DESCRIPTION	PRE'D.	CHE'D BY	APP'D BY	

NOTE

1- ROOT GAPS OF BUTT WELD FITTINGS ARE NOT INCLUDED IN DIMENSIONS
2- ISOMETRIC DRAWING FOR 1 1/2" AND SMALLER PIPINGS ARE JUST FOR INFORMATION. PIPING ROUTING, DIMENSIONS AND ELEVATIONS TO BE CHECKED BY CONSTRUCTION CONSTRUCTOR BEFORE INSTALLATION.
3- FOR 1 1/2" AND SMALLER, SUPPORTS TO BE SELECTED BY CONSTRUCTION CONSTRUCTOR EXCEPT AS NOTED.
4- ACTUAL DIMENSION AND SIZE OF SPECIAL/INSTRUMENT ITEMS SHALL BE CHECKED BEFORE SPOOL FABRICATION BY CONSTRUCTION CONTRACTOR.

Petro Pars Ghodrat Co.

Piping Supervision
شرکت رایان پلیمر پویا
سهامی خاص
نظارت پایپینگ

THIS DOCUMENT AND THE DESIGN IT COVERS IS THE PROPERTY OF POGC AND ALL RIGHTS ARE RESERVED. NEITHER IN WHOLE NOR IN PART MAY BE REPRODUCED OR TRANSMITTED TO THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF OWNER.